


Specifications:

Material: Solid Brass
Glass Thickness: 1/4" (6mm) to 1/2" (12mm)
Notch Required
Includes: Mounting screws and gaskets

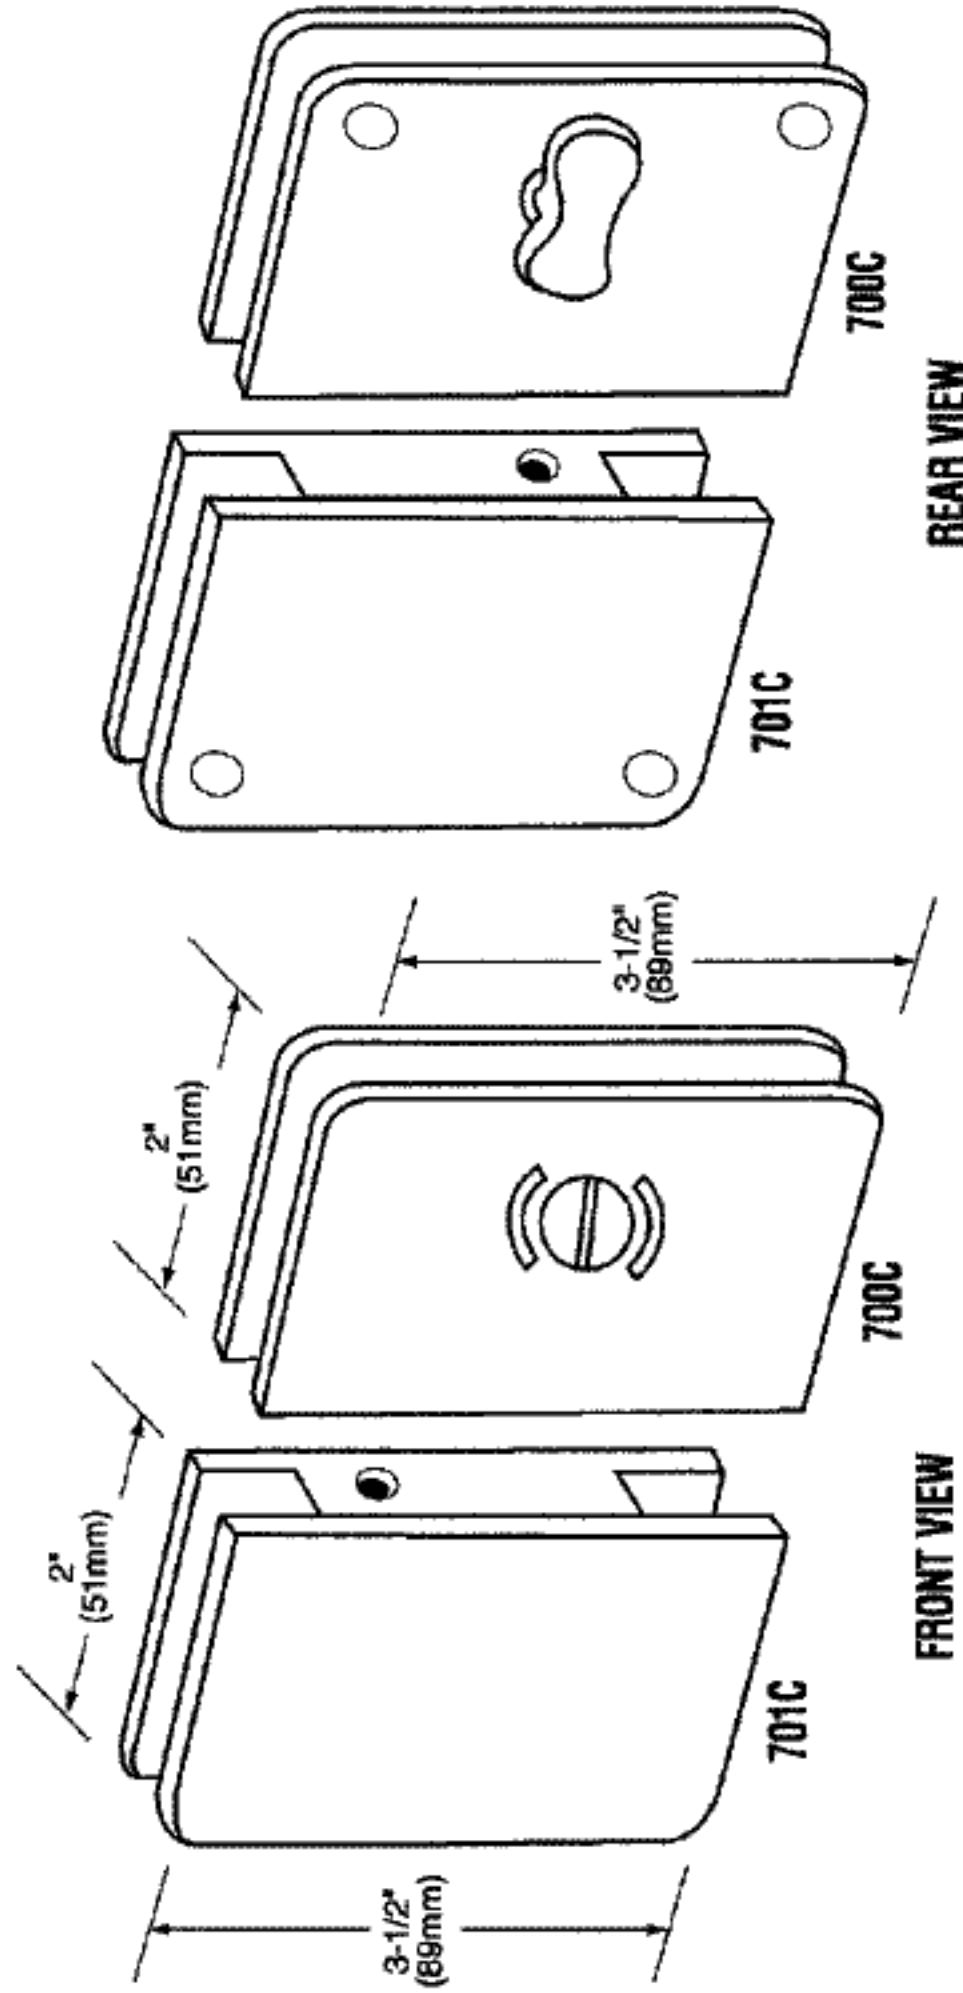

GLASS DOOR LOCK WITH INDICATOR

Template Shown on Next Page

CAT No. 700C & 701C

C.R. Laurence Co., Inc. For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144;
crlaurence.com Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 587-7501.



NOTE:


The minimum clearance between the door glass and the wall/panel is 1/8" (3mm) and the maximum clearance is 1/2" (12mm). The standard recommended clearance is 3/16" (5mm).

GLASS DOOR LOCK WITH INDICATOR

CAT No. 700C & 701C

C.R. Laurence Co., Inc.
orlaurence.com

For technical assistance in the United States call toll free (800) 421-6144; from Canada call toll free (877) 421-6144; Outside the U.S. and Canada call (323) 588-1281. Ask for Tech Sales at Extension 7740. Toll free fax (800) 587-7501.

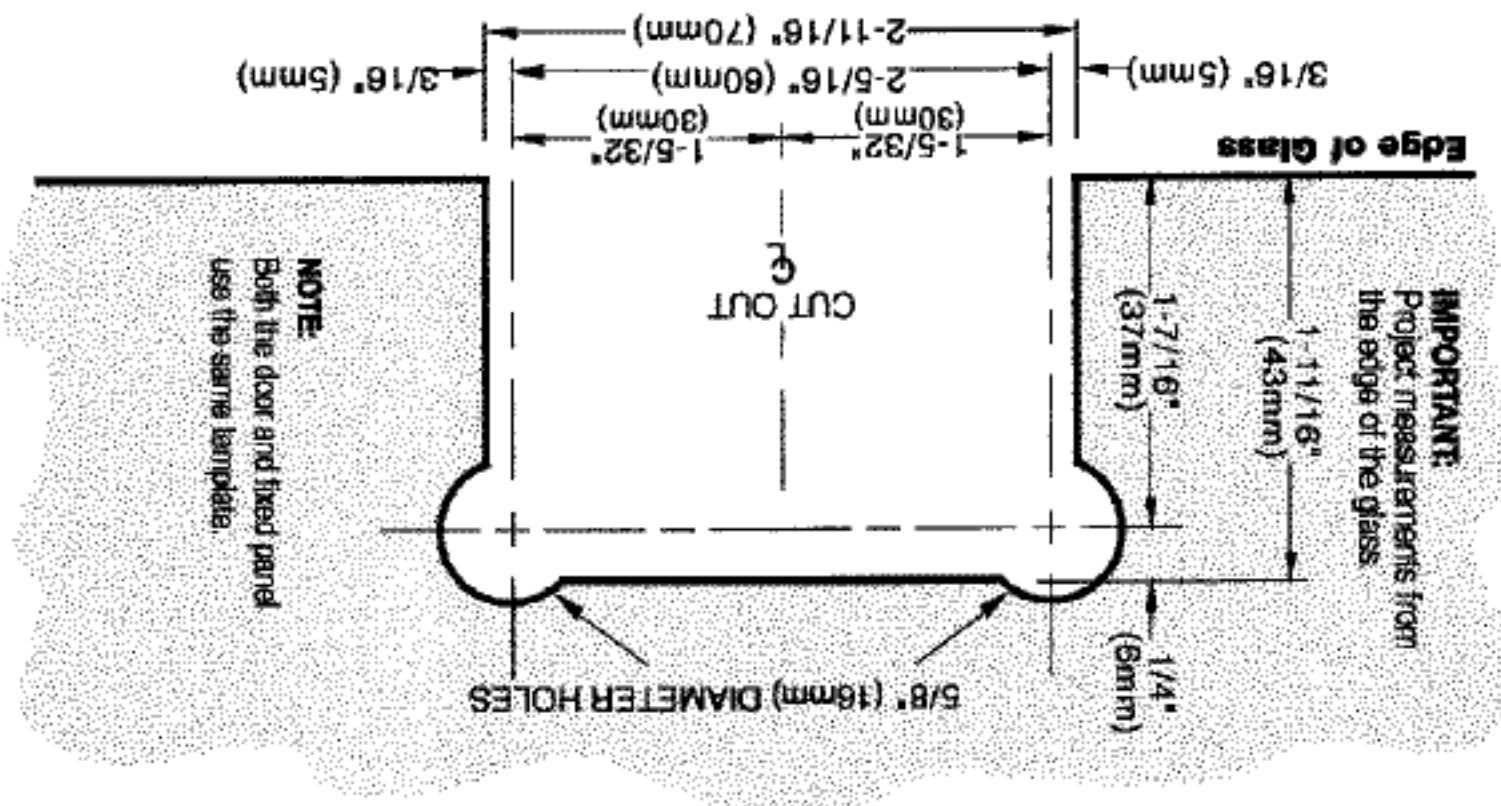

NOTE:
Both the door and fixed panel use the same template.