

Important Information:

The EUR205 Door Patch Lock is designed for European profile cylinder applications. The Patch Lock is designed for corner application at the top and/or bottom of the door and jamb mounting. Matches the AMR/EUR 201 patches in size and appearance. Cylinder sets are "bottom load" - access is required underneath the door to adjust or change cylinder set.

Specifications:

Glass Sizes: 3/8" (10mm) to 1/2" (12mm) thick tempered safety glass
Construction: - High density casting

Outout Required

Includes: Gaskets, screws and template

Accessories: (Included) - Interior & Exterior Cylinder (Set of 2)
 - Jamb or Floor Mount Keeper Plate

Available Finishes

- EUR205A Satin Aluminum
- EUR205BR Polished Brass (Lacquered)
- EUR205BS Brushed Stainless Steel
- EUR205PS Polished Stainless Steel

Use of Gaskets:

For 3/8" (10mm) Glass: Use two gaskets on each side
 For 1/2" (12mm) Glass: Use one gasket on each side

Recommendations:

For public safety, we recommend the use of only tempered safety glass.




SEE TEMPLATE ON BACK
Refer to Dimensions Shown
to Ensure Accuracy

CRL EUROPEAN EUR SERIES PATCH LOCK

Cat No. EUR205



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

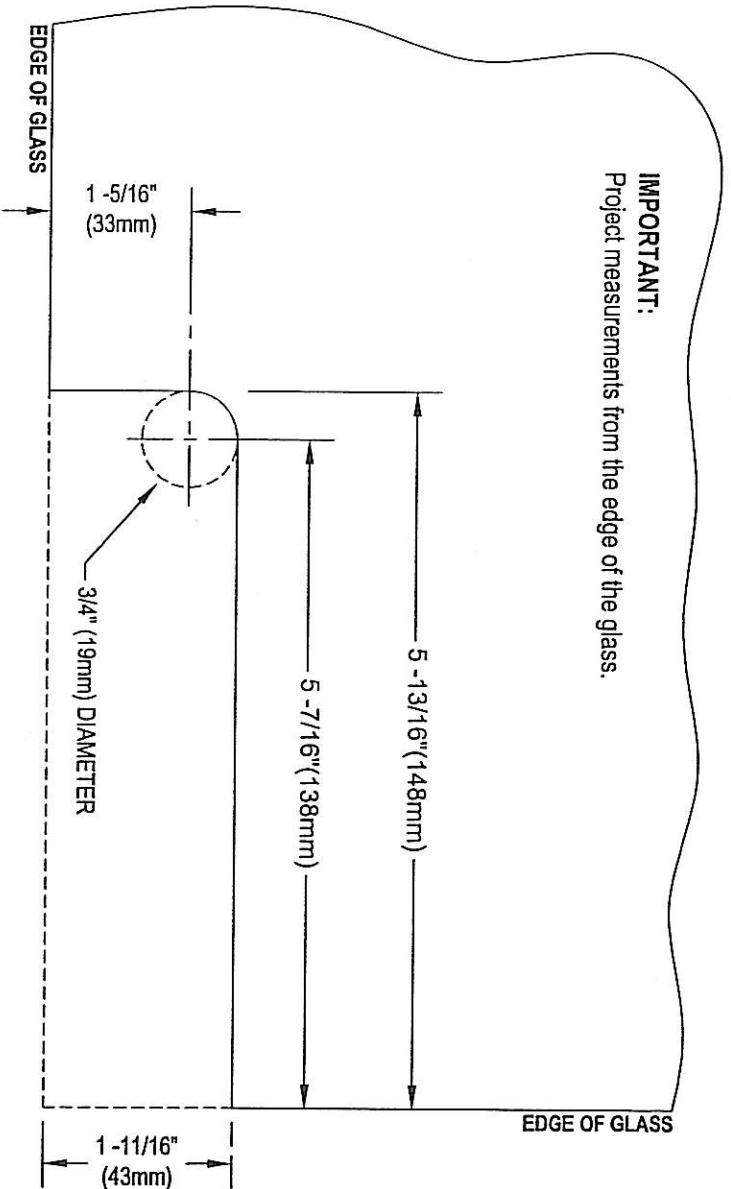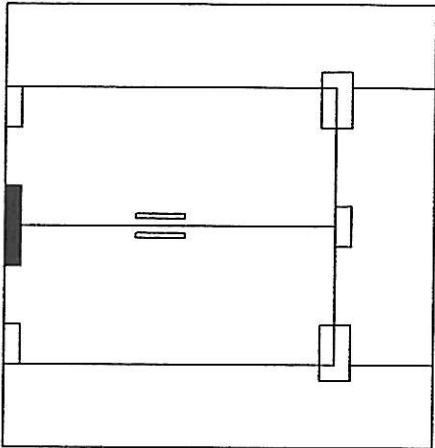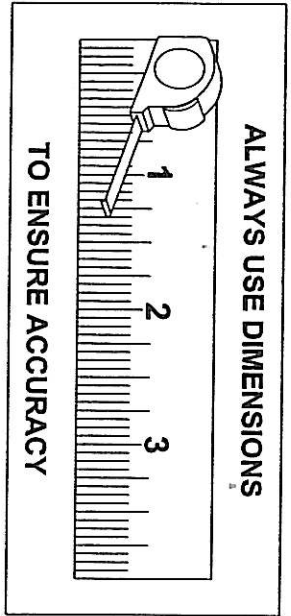


CRL EUROPEAN EUR SERIES PATCH LOCK

Cat No. EUR205


C.R. Laurence Corporate Headquarters: P.O. Box 58923 Los Angeles, CA 90058-0923; Toll Free Phone (800) 421-6144, Technical Assistance/Extension 777; Toll Free Fax (800) 587-7501



C.R. LAURENCE CO., INC.
PROFESSIONAL QUALITY

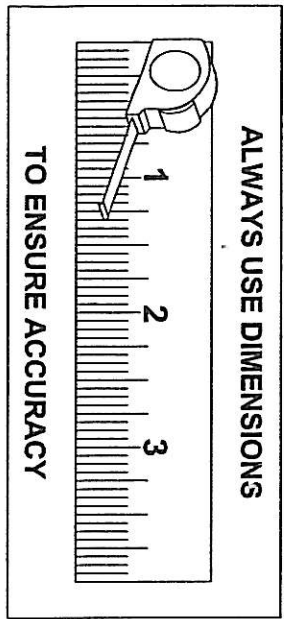

DO NOT SCALE

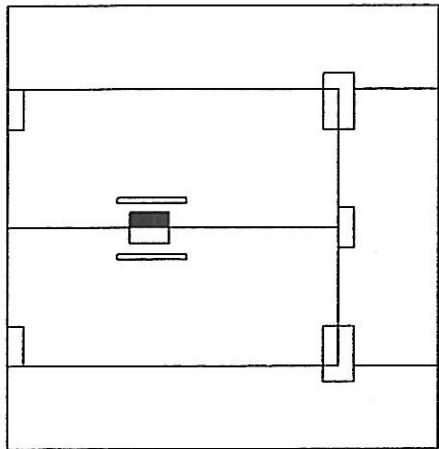

CRL EUROPEAN EUR SERIES PATCH LOCK

Cat No. EUR205 \$EUR206

